

9232 S specifications ■ ■ ■


Print features ■ ■ ■

- Mono-jet printhead
- G head (printing resolution: 71 dpi) or M head (printing resolution: 115 dpi)
- Up to 5 lines of print
- Print speed: up to 6.6 m/s
- Font height: from 5 to 32 dots
- Character height: from 1.1 to 11.4 mm
- Wide choice of 1D and 2D barcodes (EAN8/EAN13/UPCA/UPCE barcodes, code 39, interleaved 2 of 5, Datamatrix)
- Wide choice of characters (Latin, Japanese, Chinese, Korean, etc.)


Printhead

Minimum radius of curvature of the umbilical:

- Static: 100 (3.93 ")
- Dynamic: 150 (5.90 ")

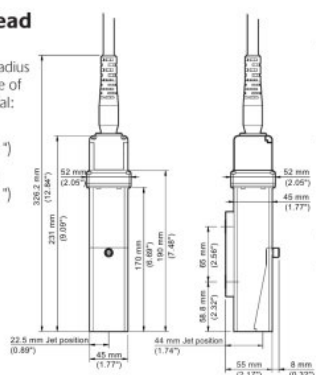

Cabinet

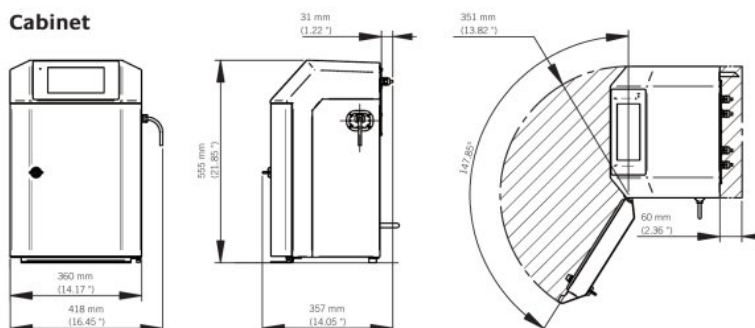

Operations ■ ■ ■

- Message library (up to 1000 messages)
- International operator/machine interface with a wide choice of languages
- WYSIWYG 7-inch wide touch screen: real-time display of remaining print capacity expressed in hours and number of messages; integrated assistance and alert system; simplified message printing and management; creation of user profiles; and tracking of consumption and printer availability
- USB and SD ports
- Jet Speed Control guarantees marking quality
- Automatic selection of fonts, depending on print speed and printhead/object distance
- Broad range of inks including high contrast ink, washable ink, high adhesion inks, alcohol-based, ketone-free and MEK-free inks
- Sealed 0.8-liter cartridges with fool proofing system
- Quick connect/disconnect of accessories (photocell, alarm and encoder)
- Parent/child connectivity
- Ethernet connectivity

Other characteristics ■ ■ ■

- Weight: 25 kg
- Table-top or vertical mounting
- Ultra-flexible 3-meter umbilical cable
- Stainless steel cabinet and printhead case
- Dust/humidity protection rating: IP56 not requiring plant air
- Operating temperature range: 0 to 40°C depending on ink used
- Humidity: 10 to 90% non-condensing
- Electrical power supply: 100-120 V or 200-240 V with automatic switching; frequency 50/60 Hz; power 60 VA

Options ■ ■ ■

- Ultra-flexible 6-meter umbilical cable
- Ultrarapid mode for high-speed printing
- Printhead pressurization kit
- RS-232/422 connectivity, parallel interface, many I/O possibilities to enable remote operation

Accessories ■ ■ ■

- Printer supports: stands (stainless steel or aluminum), table or wall mounting bracket
- Printhead stand (stainless steel)
- Different printhead brackets
- Photocells
- Encoders
- Alarm beacons (24 V)

PC software ■ ■ ■

- Compatible with CoLOS Create Professional and CoLOS Enterprise
- Logo creation with CoLOS Graphics



To learn more, scan the code with your smartphone or visit www.markem-imaje.com



We reserve the right to amend the design and/or specifications of our products without notice.

9, rue Gaspard Monge
B.P. 110
26501 Bourg-lès-Valence Cedex - France
Tel.: +33 (0) 4 75 75 55 00
Fax: +33 (0) 4 75 82 98 10

150 Congress Street
Keene, NH 03431
United States of America
Tel.: +1 800-258-5356
Fax: +1 603-357-1835



markem-imaje

A DOVER Company

